

22841** 2.8 (.110) TYPE SERIES · MALES FOR CONNECTOR



Specification Connectors

Ways 2

Counterpart 22852**

Compatible terminals 6400.**, 6401.**, 6402.**, 6402E**, 6402F**, 6403.**, 6404.**, 6406.**, 6407.**, 6408.**, 6408E**, 6409.**, 6410.**, 6411.**, 6501.**

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2284110	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
2284130	PA66V0	Natural	V0	(T.B.D.)	960°C	140°C
2284140	PA66NF	Natural	V2	(T.B.D.)	960°C	130°C

For other materials and colors ask to: info@escubedo.com


Approved regulations

Part nr.	Approval	Standard	File	Certified framework
2284110	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 105°C

Approvals



Drawing

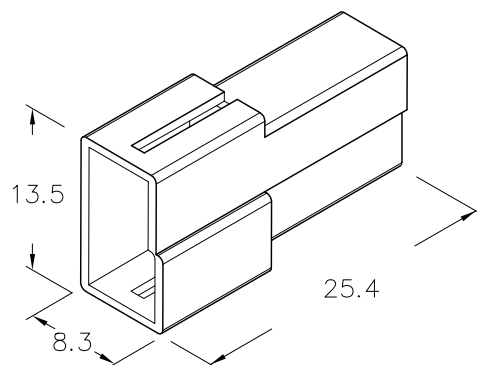

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2025-08-06	Laboratory dept.	E. Roura (labotaroy dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
 Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com