ESCUBEDO CONNECTION SYSTEMS

PRODUCT DATASHEET

22842**

2.8 (.110) TYPE SERIES · RECEPTACLES

Specification Receptacle Connectors

Ways 3


Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2284210	PA66V2	Natural	V2	(T.B.D.)	850ºC	105ºC
2284230	PA66V0	Natural	V0	(T.B.D.)	960ºC	140ºC
2284240	PA66NF	Natural	V2	(T.B.D.)	960ºC	130ºC
2284245	PA66NF	Black	V2	(T.B.D.)	960ºC	130ºC

For other materials and colors ask to: info@escubedo.com

Compatible terminals 4504.**, 4505.**, 4506.**, 4507.**

Drawing

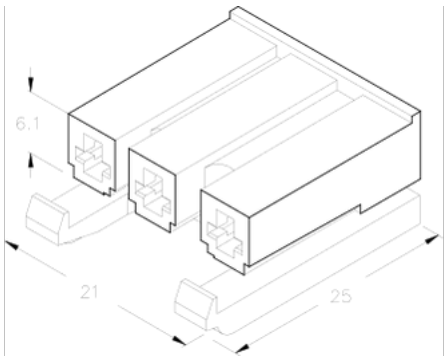

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Dataseheet generated automatically [A1]	2026-11-05	E. Roura (laboratory dept.)	E. Turon (engineering dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com