PRODUCT DATASHEET

22873**

2.8 (.110) TYPE SERIES · RECEPTACLES FOR CONNECTOR

Specification

Receptacle Connectors

Ways

3

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2287310	PA66V2	Natural	V2	(T.B.D.)	850ºC	105ºC
2287315	PA66V2	Black	V2	(T.B.D.)	850ºC	105ºC

For other materials and colors ask to: info@escubedo.com

Compatible terminals


4102.**, 4105.**, 4105E**, 4106.**, 4106F**, 4106G**, 4107.**, 4108.**, 4108E**, 4300.**, 4302.**, 4304.**, 4306.**, 4308.**, 4310.**, 4108F**

Insertion / Withdrawal forces

	2287310 / 15
Terminal into connector cavity. Insertion force (max)	15N[1]
Terminal from connector cavity - only primary lock. Withdrawal force (min)	60N[1]
Terminal from connector cavity - primary + secondary lock. Withdrawal force (min)	100N[1]

[1] Valid for Escubedo standard terminal for connector 2.8.

Drawing

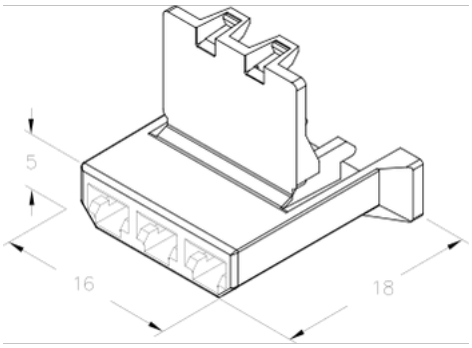

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2026-11-09	E. Roura (laboratory dept.)	E. Turon (engineering dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com