

24833**

4.8 (.187) TYPE SERIES · FLAGS



Specification Flag receptacle housings

Ways 1

Compatible terminals 5812.**, 5812E**, 5814.**, 5814C**, 5814E**, 5817.**, 5819.**

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2483310	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
2483330	PA66V0	Natural	V0	750°C	960°C	140°C
2483340	NO FLAME	Natural	V2	(T.B.D.)	960°C	130°C
2483350	Stanyl	Natural	V2	(T.B.D.)	850°C	150°C
2483360	PAV0NF	Natural	V0	750°C	960°C	130°C

For other materials and colors ask to: info@escubedo.com

Insertion / Withdrawal forces

	2483310 / 30 / 50 / 60
Terminal from connector cavity - only primary lock. Withdrawal force (min)	50N
Terminal from connector cavity - primary + secondary lock. Withdrawal force (min)	100N
Terminal into connector cavity. Insertion force (max)	15N


Approved regulations

Part nr.	Approval	Standard	File	Certified framework
2483310	UL	UL 310	E245592	V2 / RTI Elec., Max. Operating Temp, 105°C
2483330	UL	UL 310	E245592	V0 / RTI Elec., Max. Operating Temp, 140°C
2483360	UL	UL 310	E245592	V0 / RTI Elec., Max. Operating Temp, 130°C

Approvals



Drawing

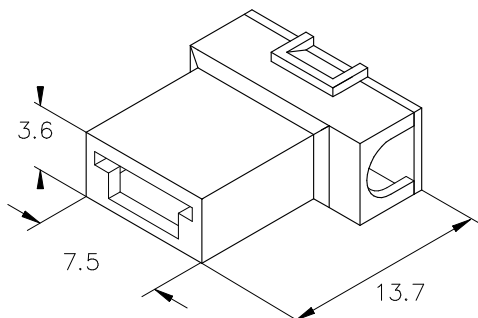

24833****4.8 (.187) TYPE SERIES · FLAGS**

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A5	Update RTI, standards and regulations	2026-02-11	Laboratory dept.	E. Roura (laboratory dept.)
A4	Added reference 2483340	2024-02-09	O.Roura (Engineering Dept.)	O.Roura (Engineering Dept.)
A3	Added reference 2483330	2023-02-06	O.Roura (Engineering Dept.)	O.Roura (Engineering Dept.)
A2	Change company name and logo	2021-10-21	E. Roura	M. Codina
A1	Datasheet generated automatically [A1]	2020-09-18	E. Roura	M. Codina

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com