

## 26319\*\*

### 6.3 (.250) TYPE SERIES · RECEPTACLES

SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.



#### Specification

Receptacle housings

#### Ways

1

#### Thermal Characteristics

| Part nr. | Raw material | Color   | Flammability Class (UL 94) | Glow Wire Test (GWT) (IEC60695-2-11) | Glow Wire Flammability Index (IEC60695-2-12) | RTI electrical (Max. Operating Temp.) |
|----------|--------------|---------|----------------------------|--------------------------------------|----------------------------------------------|---------------------------------------|
| 2631910  | PA66V2       | Natural | V2                         | (T.B.D.)                             | 850°C                                        | 105°C                                 |

For other materials and colors ask to: [info@escubedo.com](mailto:info@escubedo.com)

#### Compatible terminals

4920.\*\*, 4921.\*\*, 4922.\*\*, 4924.\*\*

#### Insertion / Withdrawal forces

|                                        | 2631910          |
|----------------------------------------|------------------|
| 1st Insertion (max, housing-terminal)  | 25N <sup>1</sup> |
| 1st Withdrawal (min, housing-terminal) | 50N <sup>1</sup> |

<sup>1</sup> Valid for UP-TP SEK


#### Approved regulations

| Part nr. | Approval | Standard | File    | Certified framework                        |
|----------|----------|----------|---------|--------------------------------------------|
| 2631910  | UL       | UL 310   | E245592 | V2 / RTI Elec., Max. Operating Temp, 105°C |

#### Approvals



#### Drawing

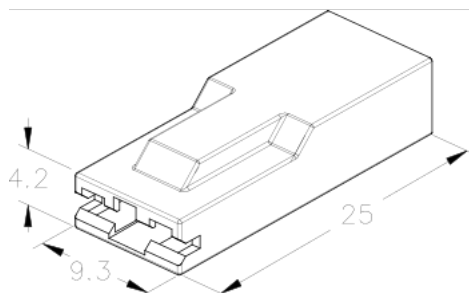

#### Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us