

26330**

6.3 (.250) TYPE SERIES · FLAGS



Specification Flag receptacle housings

Ways 1

Compatible terminals 5420.**, 5422.**, 5424.**, 5426.**, 5427.**, 5428.**, 5429.**, 5430.**

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2633010	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
2633030	PA66V0	Natural	V0	(T.B.D.)	960°C	140°C
2633040	PA66NF	Natural	V2	750°C	960°C	130°C
2633050	Stanyl	Natural	V2	550°C	-	150°C
2633060	PAV0NF	Natural	V0	750°C	960°C	130°C

For other materials and colors ask to: info@escubedo.com


Approved regulations

Part nr.	Approval	Standard	File	Certified framework
2633010	UL	UL 310	E245592	V2 / RTI Elec., Max. Operating Temp, 105°C
2633030	UL	UL 310	E245592	V0 / RTI Elec., Max. Operating Temp, 140°C
2633040	UL	UL 310	E245592	V2 / RTI Elec., Max. Operating Temp, 130°C
2633060	UL	UL 310	E245592	V0 / RTI Elec., Max. Operating Temp, 130°C

Approvals



Drawing

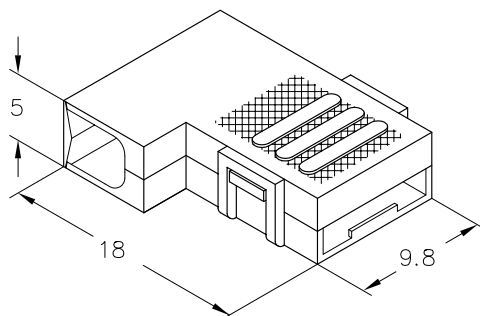

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2026-02-11	Laboratory dept.	E. Roura (laboratory dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
 Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com