

26333**

6.3 (.250) TYPE SERIES · FLAGS



Specification Flag receptacle housings

Ways 1

Compatible terminals 5820.**, 5820F**, 5822.**, 5823.**, 5836.**

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2633310	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
2633330	PA66V0	Natural	V0	(T.B.D.)	960°C	140°C
2633340	NO FLAME	Natural	V2	750°C	960°C	130°C
2633360	PA66 GWT750°C	Natural	V0	(T.B.D.)	960°C	130°C
BM2633310	PA6V2	Natural	V2	(T.B.D.)	(T.B.D.)	(T.B.D.)

For other materials and colors ask to: info@escubedo.com

Insertion / Withdrawal forces

	2633310 / 30 / 40 / 60 / 10
Terminal into connector cavity. Insertion force (max)	25N
Terminal from connector cavity - only primary lock. Withdrawal force (min)	40N
Terminal from connector cavity - primary + secondary lock. Withdrawal force (min)	130N


Approved regulations

Part nr.	Approval	Standard	File	Certified framework
2633310	UL	UL 310	E245592	V2 / RTI Elec., Max. Operating Temp, 105°C
2633330	UL	UL 310	E245592	V0 / RTI Elec., Max. Operating Temp, 140°C
2633340	UL	UL 310	E245592	V2 / RTI Elec., Max. Operating Temp, 130°C
2633360	UL	UL 310	E245592	V0 / RTI Elec., Max. Operating Temp, 130°C

Approvals



Drawing

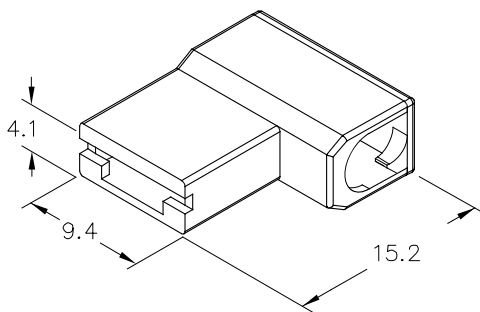

26333****6.3 (.250) TYPE SERIES · FLAGS**

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2026-02-11	Laboratory dept.	E. Roura (laboratory dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com