ESCUBEDO CONNECTION SYSTEMS

PRODUCT DATASHEET

26352**

6.3 (.250) TYPE SERIES · RECEPTACLES FOR CONNECTOR

Description Unstepped

Specification Receptacle Connectors

Ways 2

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2635210	PA66V2	Natural	V2	(T.B.D.)	850ºC	105ºC
2635230	PA66V0	Natural	V0	(T.B.D.)	960ºC	140ºC
2635240	PA6V2NF	Natural	V2	(T.B.D.)	960ºC	130ºC
2635260	PAV0NF	Natural	V0	(T.B.D.)	960ºC	120ºC

For other materials and colors ask to: info@escubedo.com

Counterparts 26342**

Compatible terminals 4321.**, 4323.**, 4325.**, 4327.**, 4328.**, 4330.**, 4331.**, 4332E**, 4333.**, 4335.**, 4336E**, 4337.**, 4346.**, 4348.**

Insertion / Withdrawal forces

	2635210	2635230 / 40 / 60
1st Insertion (max)	15N	15N[1]
1st Withdrawal (min, primary lock only)	90N	90N[1]
1st Insertion (max, connector-counterpart)	80N	80N[1]
1st Withdrawal (min, connector-counterpart, with dimple)	80N	80N[1]
1st Withdrawal (min, connector-counterpart, without dimple)	40N	40N[1]


[1] Valid for

Approved regulations

Part nr.	Approval	Standard	File	Certified framework
2635210	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 65ºC
2635230	UL	UL 1977	E245592	V0 / RTI Elec., Max. Operating Temp, 140ºC
2635240	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 130ºC
2635260	UL	UL 1977	E245592	V0 / RTI Elec., Max. Operating Temp, 130ºC

Approvals

Drawing

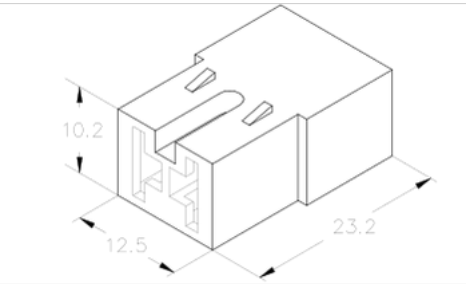

26352**

6.3 (.250) TYPE SERIES · RECEPTACLES FOR CONNECTOR

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2026-11-16	O.Roura (Engineering Dept.)	E.Roura (Laboratory Dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com