

26356**

6.3 (.250) TYPE SERIES · RECEPTACLES FOR CONNECTOR



Specification Receptacle Connectors

Ways 6

Compatible terminals 4321.**, 4323.**, 4325.**, 4327.**, 4328.**, 4330.**, 4331.**, 4332E**, 4333.**, 4335.**, 4336E**, 4337.**, 4346.**, 4348.**

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2635610	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
2635630	PA66V0	Natural	V0	(T.B.D.)	960°C	140°C
2635640	NO FLAME	Natural	V2	(T.B.D.)	960°C	130°C
2635660	PAV0NF	Natural	V0	(T.B.D.)	960°C	130°C

For other materials and colors ask to: info@escubedo.com

Insertion / Withdrawal forces

	2635610
1st Insertion (max, connector-receptacle)	15N
1st Withdrawal (min, connector-receptacle)	90N


Approved regulations

Part nr.	Approval	Standard	File	Certified framework
2635610	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 105°C
2635630	UL	UL 1977	E245592	V0 / RTI Elec., Max. Operating Temp, 140°C
2635640	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 130°C
2635660	UL	UL 1977	E245592	V0 / RTI Elec. Max. Operating Temp, 130°C

Approvals



Drawing

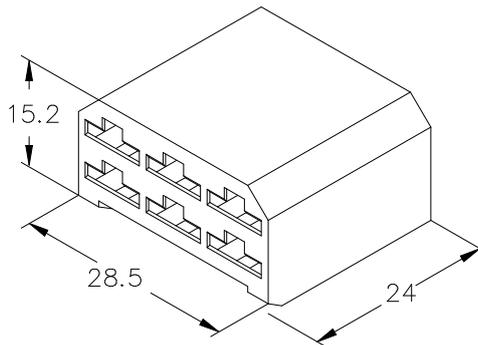

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2026-02-11	Laboratory dept.	E. Roura (laboratory dept.)