

4943.**

6.3 (.250) TYPE SERIES · RECEPTACLES

SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.



Specification Self-locking terminals under TP design

For male (mm) 6,3x0,8

Wire size mm² (AWG) 0,2-0,6 (24-20)

Ø Insulation (mm) 1,1-2,1

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)	Contact Resist (mΩ)
4943.00	Brass	Natural	110	1.50
4943.01	Brass	Pre-tin-plated	120	0.75
4943.24	Steel	Nickel-plated	300	2.50
4943.30	Bronze	Natural	120	1.25
4943.31	Bronze	Pre-tin-plated	130	0.75

Material thickness (mm) 0,4

Max. rated current

Wire section	4943.00 / 01 / 24 / 30 / 31
0.20 mm ²	2A
0.25 mm ²	2A
0.35 mm ²	6A
0.50 mm ²	8A
0.60 mm ²	8A

Compatible connectors 26418**, RS5412**-K, RS5413**-K, RS5414**-K, RS5415**-K, 26417**

Insertion / Withdrawal forces

	4943.00 / 01 / 30 / 31	4943.24
1st Insertion (max)	25N ¹	35N ¹
1st Withdrawal (min, locking enabled)	90N ¹	90N ¹
1st Withdrawal (max)	25N ¹	35N ¹

¹ Valid for Natural Brass Tab

Security function

Self-locking function prevents disconnection by pulling the cable.
Disconnection is possible disabling the locking function, pressing the lever manually or sliding the connector (see withdrawal forces).
It allows several connections-disconnections maintaining the functional features.

Application tool MN4943

Wire strip length 5.5 (±0.5) mm

4943.**

6.3 (.250) TYPE SERIES · RECEPTACLES

SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.



Crimping parameters & pull out force

Wire section (±10%)	Conductor		Insulator	Pull-out force (N)
	Height (mm)	Width (mm)		
0.20 mm ²	1.10 (±0.03)	1.95 (±0.03)	3.16 (±0.10)	28N @ 60s
0.25 mm ²	1.15 (±0.03)	1.95 (±0.03)	3.15 (±0.10)	28N @ 60s
0.35 mm ²	1.20 (±0.03)	1.95 (±0.03)	3.15 (±0.10)	40N @ 60s
0.50 mm ²	1.25 (±0.03)	1.96 (±0.03)	3.14 (±0.10)	56N @ 60s
20 AWG	1.25 (±0.03)	1.95 (±0.03)	3.15 (±0.10)	58N @ 60s
22 AWG	1.20 (±0.03)	1.95 (±0.03)	3.15 (±0.10)	36N @ 60s
24 AWG	1.10 (±0.03)	1.95 (±0.03)	3.16 (±0.10)	22,3N @ 60s

Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

Winding number

8000



Approved regulations

Part nr.	Approval	Standard	File	Certified framework
4943.00	UL	UL 310	E211727	AWG 24-20 (MV-10 Stranded Cu) / MN4943
4943.01	UL	UL 310	E211727	AWG 24-20 (MV-10 Stranded Cu) / MN4943
4943.24	UL	UL 310	E211727	AWG 24-20 (MV-10 Stranded Cu) / MN4943

Approvals



Drawing

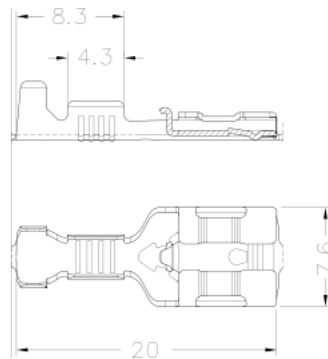


4943.00 NATURAL BRASS
6.3 (.250) TYPE SERIES · RECEPTACLES
SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.




Derating curve

Current carrying capacity vs. Ambient temperature

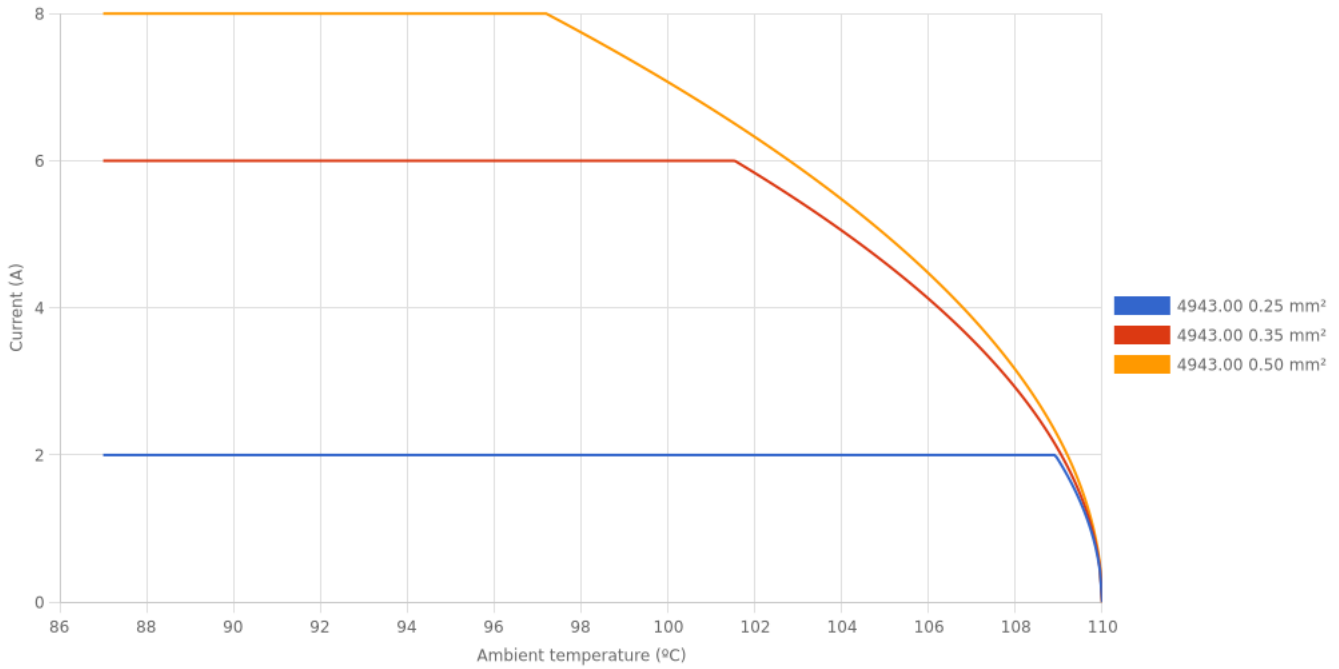

Temperature rise curve

Terminal temperature rise due to the current carried

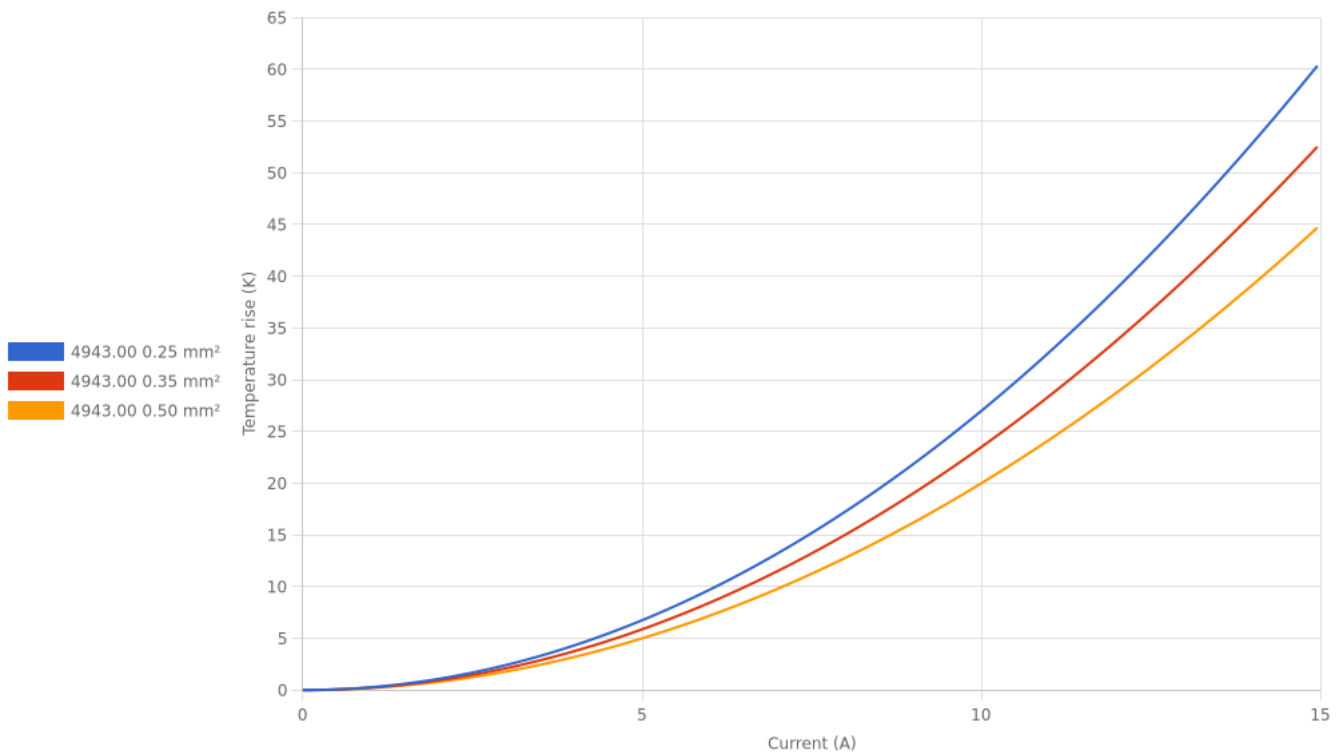


Valid for Natural Brass Tab

4943.01 PRE-TIN-PLATED BRASS
6.3 (.250) TYPE SERIES · RECEPTACLES
SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.




Derating curve

Current carrying capacity vs. Ambient temperature

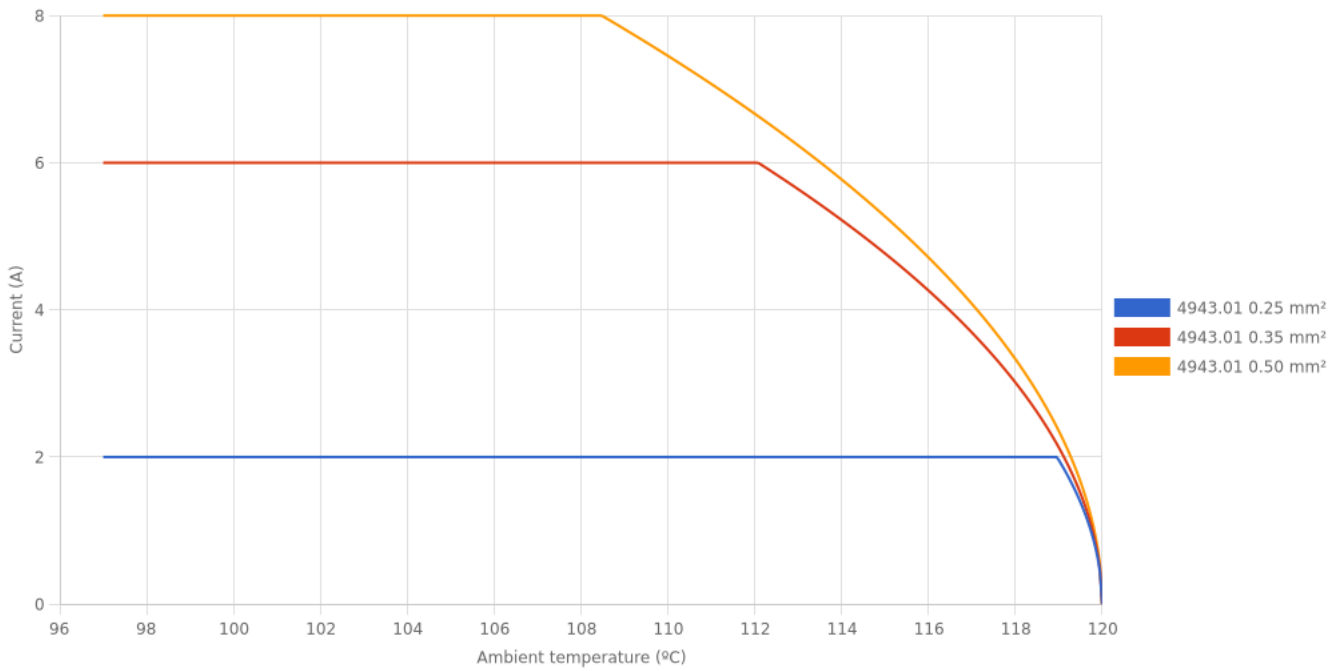

Temperature rise curve

Terminal temperature rise due to the current carried

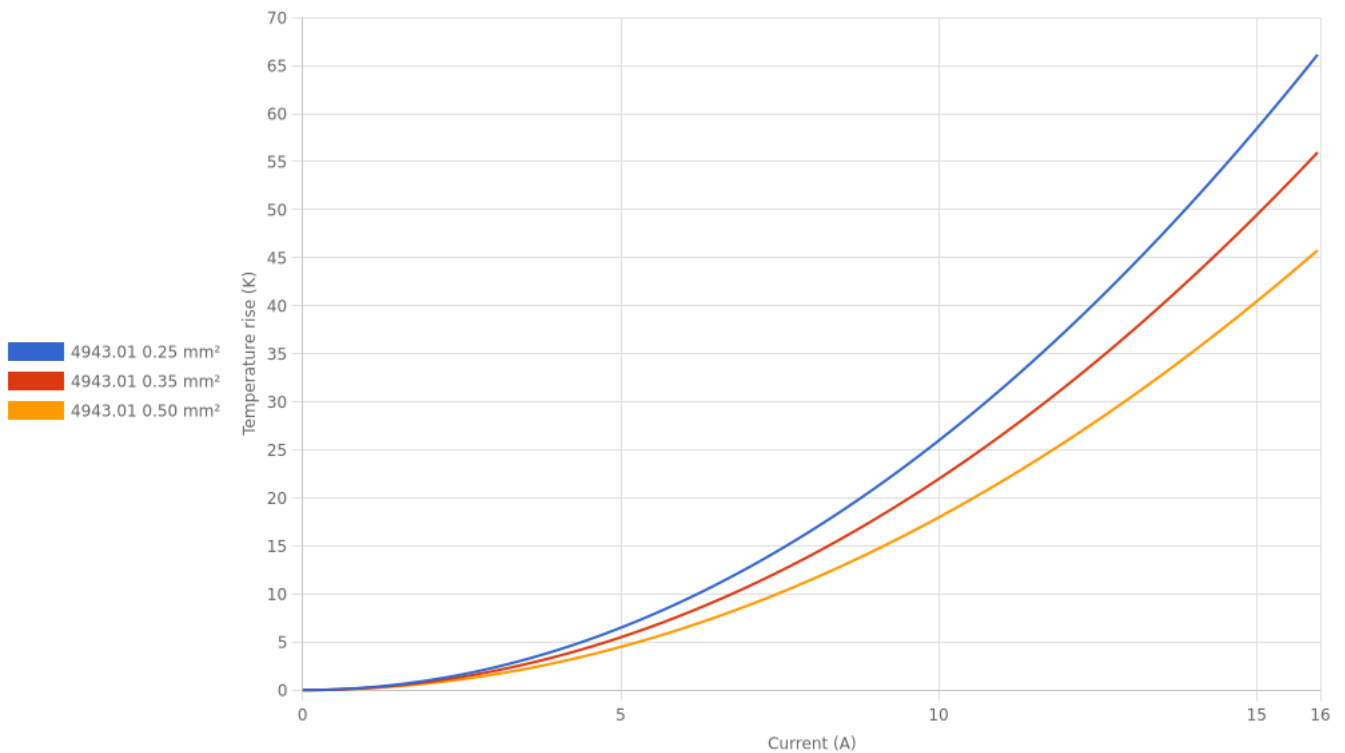


Valid for Natural Brass Tab

4943.24 NICKEL-PLATED STEEL
6.3 (.250) TYPE SERIES · RECEPTACLES
SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.




Derating curve

Current carrying capacity vs. Ambient temperature

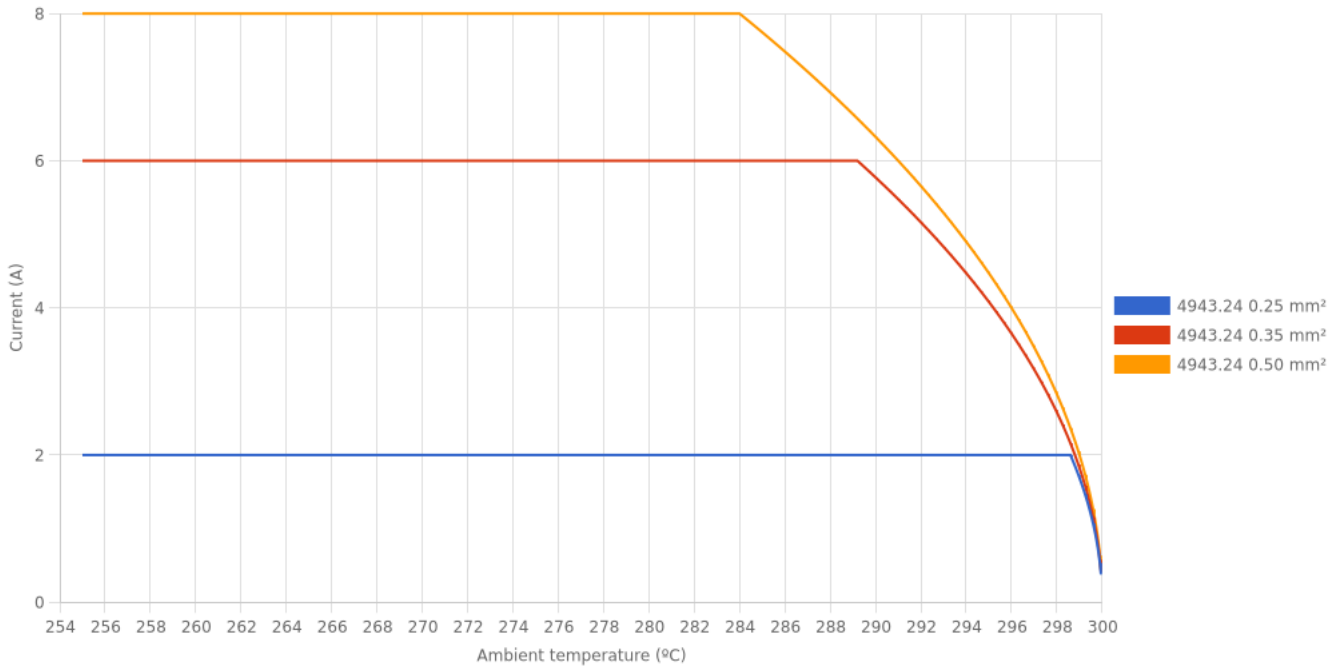

Temperature rise curve

Terminal temperature rise due to the current carried

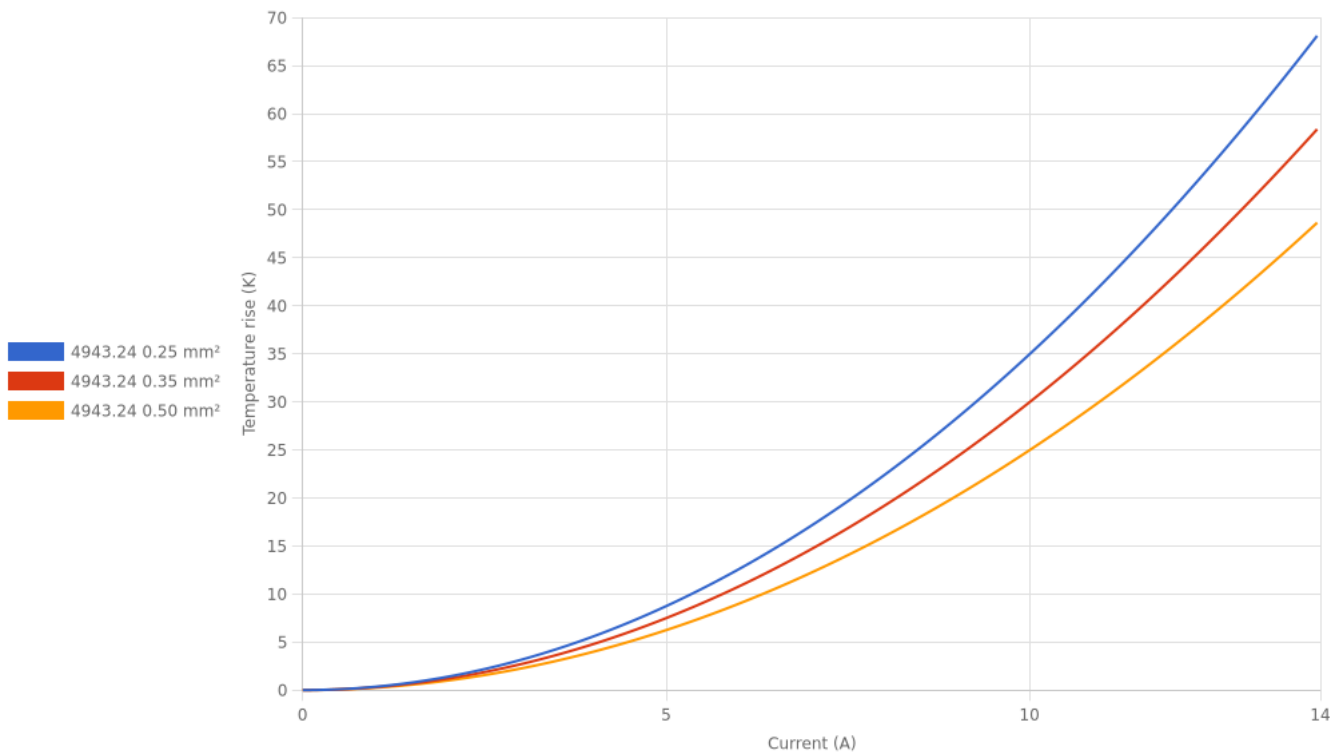


Valid for Natural Brass Tab

4943.30 NATURAL BRONZE
6.3 (.250) TYPE SERIES · RECEPTACLES
SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.




Derating curve

Current carrying capacity vs. Ambient temperature

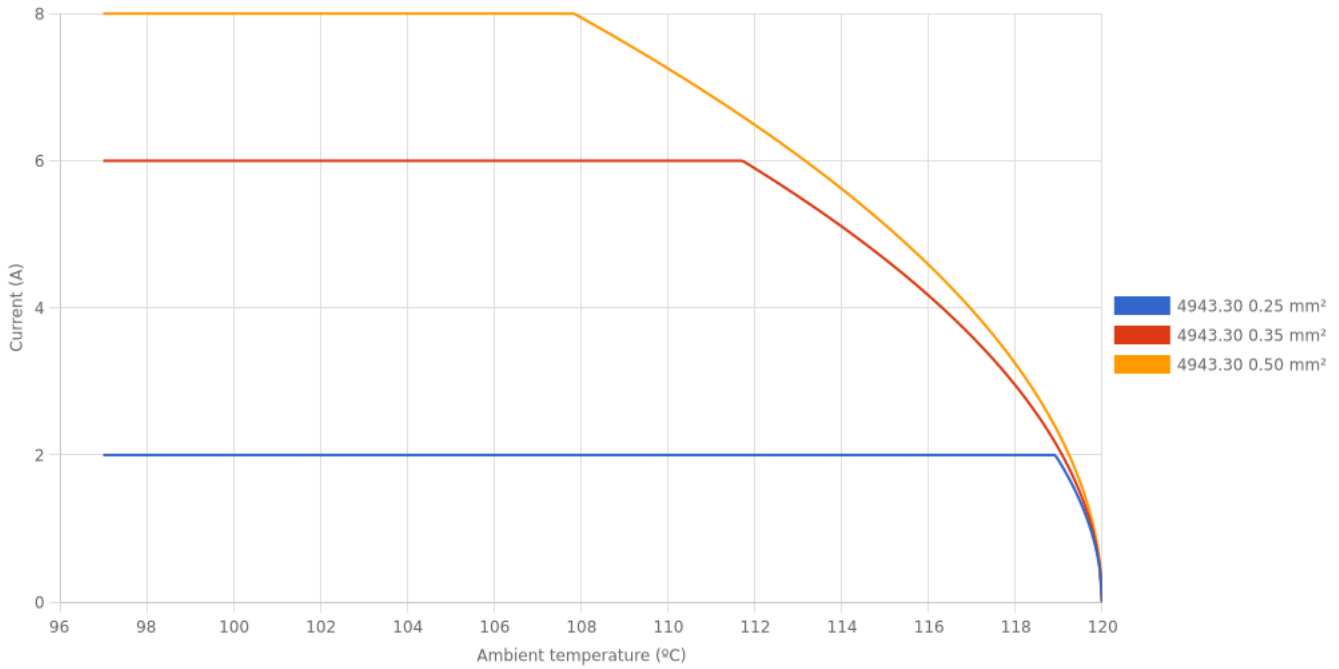

Temperature rise curve

Terminal temperature rise due to the current carried

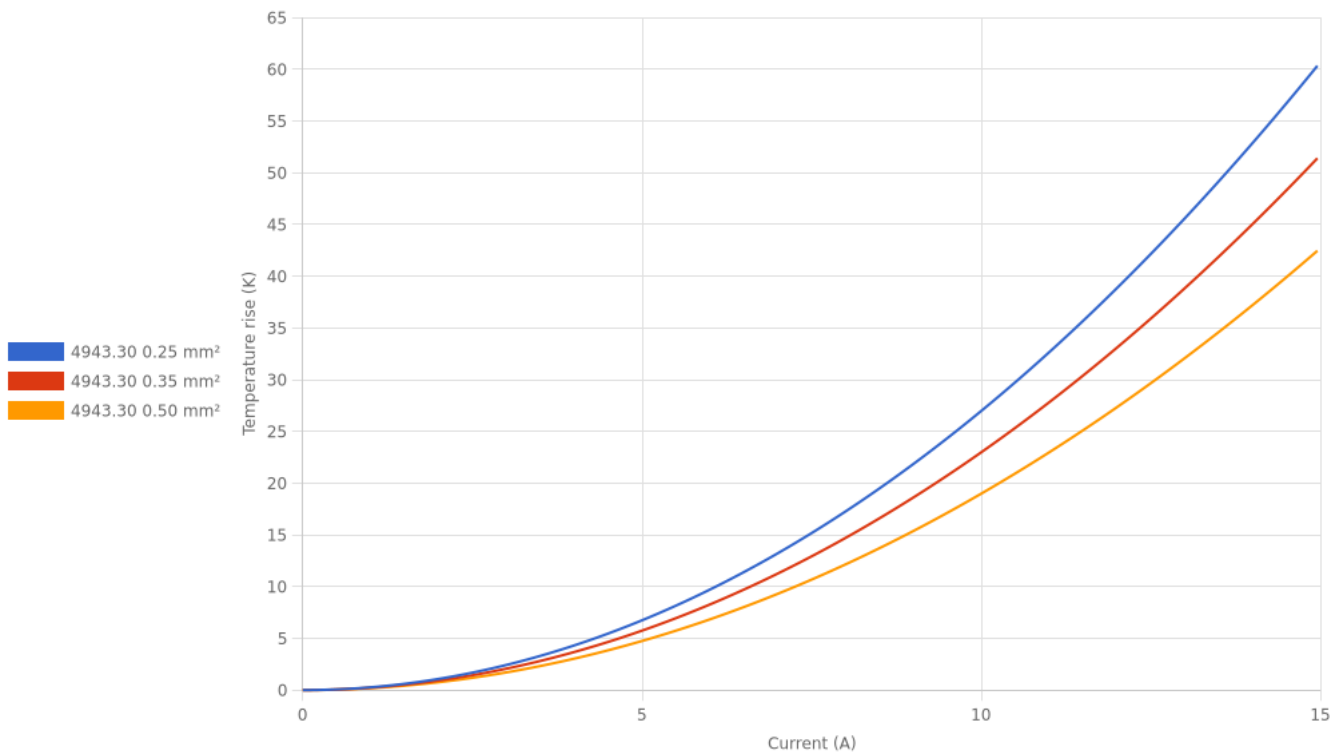

Valid for Natural Brass Tab

4943.****6.3 (.250) TYPE SERIES · RECEPTACLES****SELF-LOCKING RECEPTACLES. LOW INSERTION TERMINALS.****Disclaimer**

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us