

5118.** SPECIAL TERMINALS · SPLICES



Specification End crimping

Wire size mm² (AWG) 0,3-1,5 (22-16)

Materials, temperature and contact resistance


Part nr.	Material	Finishing	Max. Temp. (°C)
5118.00	Brass	Natural	110
5118.02	Brass	Tin plated	120
5118.24	Steel	Nickel-plated	300

Material thickness (mm) 0,3

Application tool MN5118

Wire strip length 6.0 (±0.3) mm

Crimping parameters & pull out force

Wire section (±10%)	Conductor 		Pull-out force (N)
	Height (mm)	Width (mm)	
0.30 mm ²	1.15 (±0.03)	2.45 (±0.03)	40N @ 60s
0.50 mm ²	1..22 (±0.03)	2.46 (±0.03)	56N @ 60s
0.75 mm ²	1.30 (±0.05)	2.48 (±0.05)	84N @ 60s
1.00 mm ²	1.40 (±0.05)	2.49 (±0.05)	108N @ 60s
1.50 mm ²	1.55 (±0.05)	2.51 (±0.05)	150N @ 60s

Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

Winding number 30000

W (mm) 5,8

Approved regulations



Part nr.	Approval	Standard	File	Certified framework
5118.00 ¹	UL	UL 486A-486B	E232316	AWG 22-16 (7-26 Stranded Cu) / MN5118

¹ 0,3, SOL/STR

Approvals



Drawing

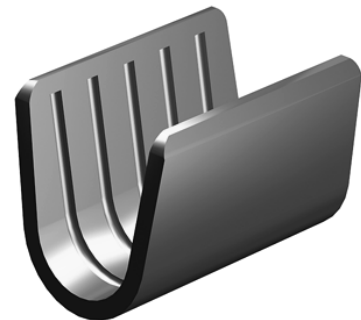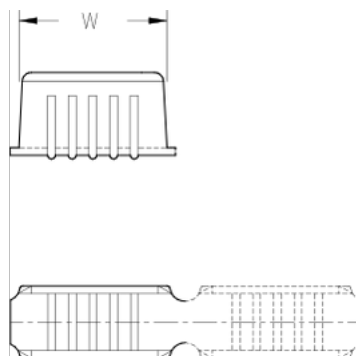

5118.**
SPECIAL TERMINALS · SPLICES**Disclaimer**

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us