

8805F** SPECIAL TERMINALS · LAMPHOLDER



Specification PS21W Lamp contact

Wire size mm² (AWG) 0,5 (20)

Ø Insulation (mm) 1,5

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)
8805F61	Inox	Pre-tin-plated	300

Material thickness (mm) 0,3

Max. rated current

Wire section	8805F61
0.50 mm ²	8A

Application tool MN8805F

Wire strip length 4.0 (±0.5) mm

Crimping parameters & pull out force

Wire section (±10%)	Conductor		Insulator	Pull-out force (N)
	Height (mm)	Width (mm)	Width (mm)	
0.50 mm ²	1.20 (±0.03)	1.85 (±0.03)	2.40 (±0.10)	56N @ 60s


Values only valid for the application tool specified upwards. The insulator widths are only indicative as they are dependent on the sheath thickness of the wire used.

Winding number 4500

Approvals



Drawing

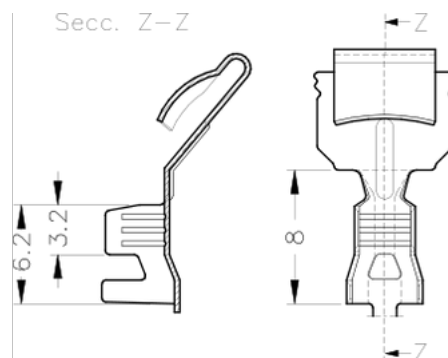

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us