

R5645**-K

RAST 5 TERMINALS AND CONNECTORS · MALE CONNECTORS



Specification Male RAST 5 Crimp Connect Connectors

Compatible terminals 6421.**, 6423.**, 6424.**, 6425.**, 6426.**, 6427.**, 6432.**, 6434.**, 6438.**, 6440.**

Counterpart R5415**-K

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
R564510-K	PA66V2	Natural	V2	(T.B.D.)	850°C	105°C
R564530-K	PA66V0	Natural	V0	(T.B.D.)	960°C	140°C
R564540-K	NO FLAME	Natural	V2	(T.B.D.)	960°C	130°C
R564570-K	PPV2 NF	Natural	(T.B.D.)	(T.B.D.)	(T.B.D.)	(T.B.D.)

For other materials and colors ask to: info@escubedo.com

Approved regulations


Part nr.	Approval	Standard	File	Certified framework
R564510-K	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 65°C
R564530-K	UL	UL 1977	E245592	V0 / RTI Elec., Max. Operating Temp, 140°C
R564540-K	UL	UL 1977	E245592	V2 / RTI Elec., Max. Operating Temp, 105°C
R564540-K ¹	VDE	EN 61984	DE1-70504/B1	

¹ Cat. No. meets with the standard EN611984 as a component of UP-RAST5 connection Series. 400V; max 20A

Approvals



Drawing

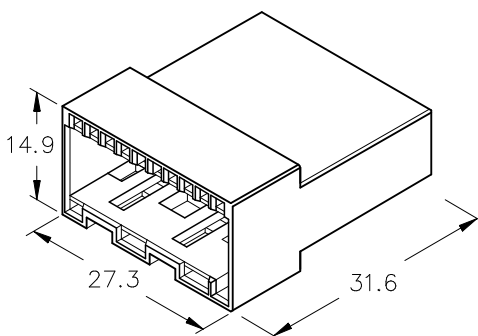

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A2	Update standards & regulations	2026-01-27	E. Roura (laboratory dept.)	E. Turon (engineering dept.)
A1	Datasheet generated automatically [A1]	2025-05-07	E. Roura (laboratory dept.)	O. Roura (engineering dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
 Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com