

26315**

6.3 (.250) TYPE SERIES · RECEPTACLES



Connector type Female Connector with Insertion Pokayoke

Specification Receptacle housings

Ways 1

Thermal Characteristics

Part nr.	Raw material	Color	Flammability Class (UL 94)	Glow Wire Test (GWT) (IEC60695-2-11)	Glow Wire Flammability Index (IEC60695-2-12)	RTI electrical (Max. Operating Temp.)
2631510	PA66V2	Natural	V2	550°C	850°C	105°C
2631530	PA66V0	Natural	V0	(T.B.D.)	960°C	140°C
2631540	PANF	Natural	V2	750°C	960°C	130°C


For other materials and colors ask to: info@escubedo.com

Insertion / Withdrawal forces

	2631510 / 30 / 40
Terminal into connector cavity. Insertion force (max)	15N ¹
Terminal from connector cavity. Withdrawal force (min)	60N ¹

¹ Valid for

Drawing

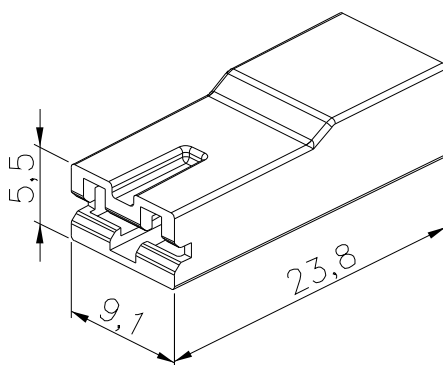

(T.B.D.): To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A1	Datasheet generated automatically [A1]	2025-12-10	O. Roura (Engineering Dept.)	E. Roura (Laboratory Dept.)

Escubedo Connection Systems, S.A.U. · 17843 Riudellots de la Creu · Girona · Spain
 Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com